

KENWOOD

VEHICLE
INTEGRATION
SOLUTIONS

Technical support provided by,

stinger
australia

P: 03 9847 0177
E: solutions@stingeraustralia.com.au

DISASSEMBLY & INSTALLATION

Installation Manual 2015-Up: Toyota Hilux



BKTO1112 Contents

2x Fascia Panel & Brackets 1x Antenna Adapter

OPTIONAL Extras Available from Stinger Australia
Reverse Camera Retention (CTCAMTY2RT)
USB Retention (MTAXTOYUSB)



Un-clip and remove the trim panel above the head unit.



Remove the 2 screw at the top of the cluster surround and un-clip from the head unit panel.



Open the glove box and un-clip the climate control and attached panel




Un-clip and remove the panel above the glove box.



Disassemble the factory head unit from the panel.



Unscrew the 4 (10mm) bolts and remove the head unit.

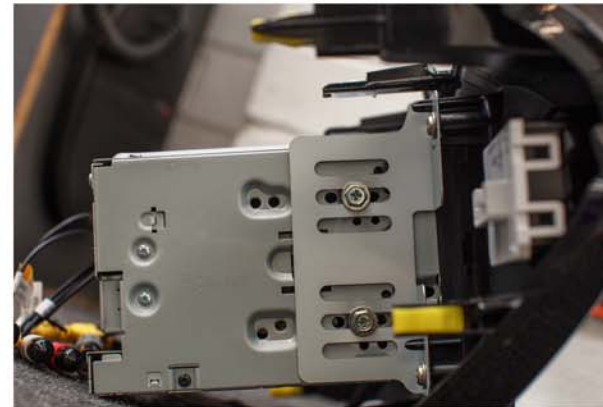

Install the BKTO1112, brackets and Kenwood head unit to the factory panel.



Connect the Kenwood harness and antenna adapter to the vehicles connectors. Also attached the optional USB and reverse camera interfaces if purchased separately.



Make all connections to vehicle and the Kenwood head unit then mount the head unit to the factory mounting locations.



Re-install everything in the reverse order to complete installation.

Before



After

