

Information

Due to the upgrade of software, the following operations change from the attached operation manual.

To connect the KCA-iP101/ KCA-iP100 (Optional accessory)

You can use the AUX input although the iPod is connected.

<Selecting the Source> (page 8)

When connection of the iPod is recognized, the source display changes from "USB" to "iPod".



- The auxiliary input requires the setting made in <Built-in Auxiliary input Setting> (page 44/ 51).


<Audio Setup> (page 9/ 10)

The "2 ZONE" (Dual Zone) function is enabled in the Audio Setup mode.

<Built-in Auxiliary input Setting> (page 44/ 51)

The AUX input can be set although the iPod is connected.

<If You Want to Connect iPod> (page 49/ 56)

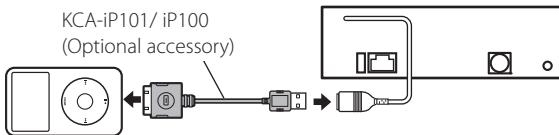

To connect the KCA-iP200 (Optional accessory)

Use <Built-in Auxiliary input Setting> (page 44/ 51) and "2 ZONE" of <Audio Setup> (page 9/ 10) keeping them "OFF".

About the playlist crossfade function of KENWOOD "Music Editor"

The playlist crossfade function can be used when the media created by "Music Editor" of PC application is played. For details on how to create a media, see the PC application help.



- The scan play, Random play, and repeat play cannot be used during playing the playlist using the crossfade function.